



Curva LED Ring Light - 3000mm diameter


Modern ring lights surface mounted on the ceiling

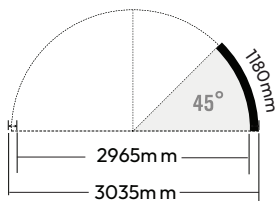

The ring light is made up of 8 of these arcs

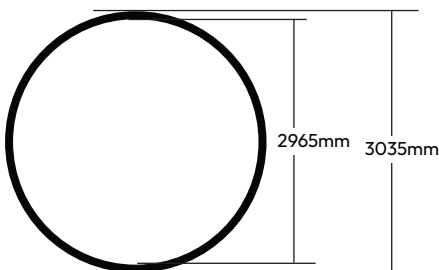

Luminaire Profile



Overview

Construction Material	Aluminium
Body Finish	Jet Black (RAL9005) Signal White (RAL9003)
Diffuser Type	Flexible silicone
IP Rating	IP20
Mounting	Surface mounted
Warranty	5 years

Luminaire Output

Colour Temperature	3000K 4000K
CRI	>90 Ra
Lighting Direction	Downwards
Beam Angle	120°
Operating Hours	50,000
Flicker Free	Yes
LEDs	Bridgelux 2835
Macadam Ellipse	Equal or less than 3 sdcm

Supply & Power

Voltage Range	100-277 VAC 50/60Hz
Power Factor	>0.5
Inrush Current	DC24V
Protection Class IEC	Class II
Ambient Temperature	-20°C to +40°C
Driver	Remote





Curva LED Ring Light - 3000mm diameter

Modern ring lights surface mounted on the ceiling

Luminaire Variants Data

Variant	Type	Wattage	Lumens at 4000K	Total Weight
LL3612300	8 x Curva downward arc 45° 20W	20W per arc	1243 per arc	~24 kg

Options

Finish	/BK	Black	/WT	White
Kelvin	/3K	3000K	/4K	4000K

Added Features

Dimming	/DD	DALI Dimming	/DH	Mains Dimming	/CC	Casambi Controlled
---------	-----	--------------	-----	---------------	-----	--------------------

Customisations are available, please get in touch

