
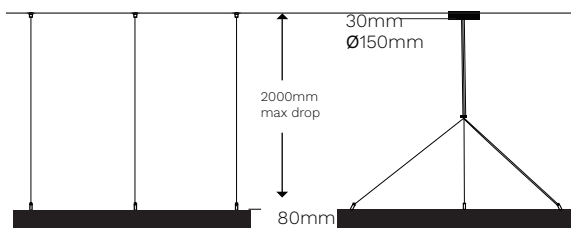



Hexa LED Hexagonal Pendant Light

Sleek luminaire in a modern hexagonal shape.

linear
lights

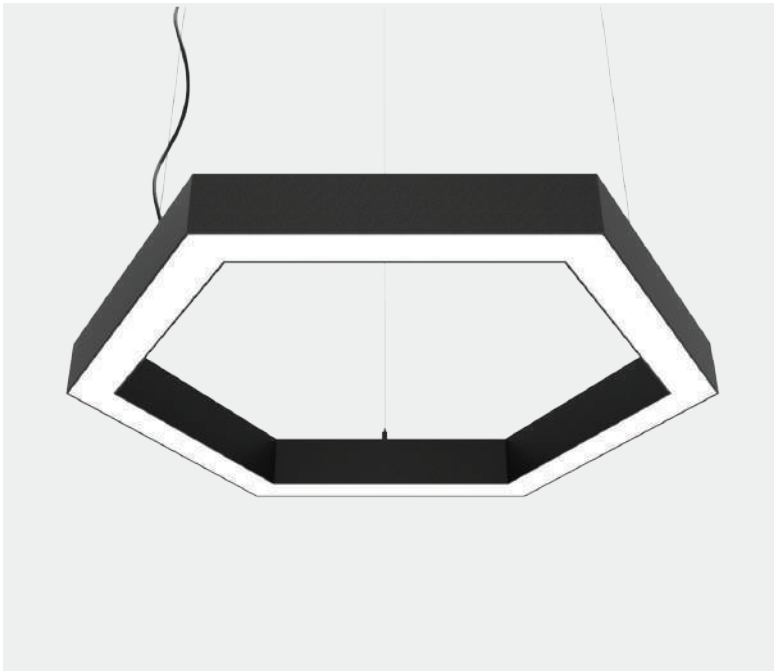

Overview

Construction Material	Aluminium AL6063
Body Finish	Black RAL9005 (jet black)
Diffuser Type	Opal polycarbonate
IP Rating	IP40
Mounting	Ceiling mounted (with/without ceiling rose)
Warranty	5 years

Luminaire Output

Colour Temperature	Switchable 3000K 4000K
CRI	>85 Ra
Efficacy	~112 lumens/watt
Lighting Direction	Downwards
Beam Angle	105°
Operating Hours	>50,000
Flicker Free	Yes
LEDs	SMD
Macadam Ellipse	Equal or less than 6 sdcm

Supply & Power

Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	0.36A
Protection Class IEC	Class I
Ambient Temperature	-20°C to +40°C
Driver	Supplied either in the ceiling rose or remote





Hexa LED Hexagonal Pendant Light

Sleek luminaire in a modern hexagonal shape.

Luminaire Variants Data

Customisations may be available, please get in touch

Variant	Wattage	Lumens	Running Current	Weight
LL820601/30W	30W	3362	DC750mA	6.0 kg
LL820601/60W	60W	6532	DC1500mA	

Added Features

Dimming	/DD	DALI Dimming	/DH	Mains Dimming
Emergency	/E	3H Integral Emergency		

Code Example

LL820601/60W/DH Hexa Pendant 60W switchable 3000K or 4000K black body, mains dimmable

