


PROLine Linear LED Light

Customisable linear lighting system with square aperture optics

linear
lights

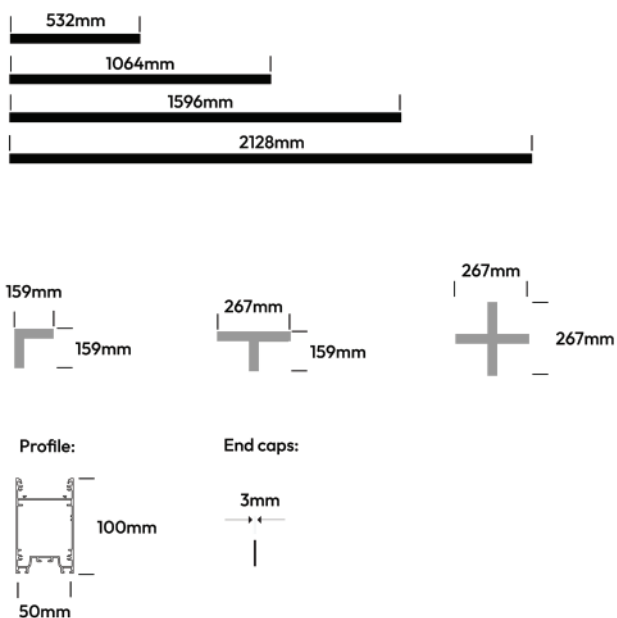

Overview

Construction Material	Aluminium
Body Finish	Jet Black (RAL9005) Traffic White (RAL9016)
Optics	Single square glare control cells
Linkable	Yes
IP Rating	IP40
IK Rating	IK08
Mounting	Ceiling mounted, Suspended
Warranty	5 years

Luminaire Output

Colour Temperature	3000K 4000K
CRI	>90 Ra
Lighting Direction	Downwards (Optional Indirect)
Beam Angle	90°
Operating Hours	50,000
Flicker Free	Yes
LEDs	Single Bin Samsung
Macadam Ellipse	Equal or less than 3 sdcm
UGR	<14

Supply & Power

Voltage Range	AC220-240V
Power Factor	>0.95
Inrush Current	60A
Protection Class IEC	Class I
Ambient Temperature	-20°C to +40°C
Driver	Integral



PROLine Linear LED Light

Customisable linear lighting system with square aperture optics



Luminaire Variants Data

Customisations may be available, please get in touch

Variant	Length	Wattage	Lumens at 4000K	Weight	Connector	Shape	Weight
LL340502	532mm	14W	1721	2.1 kg	LL340102	L connector	0.4 kg
LL341102	1064mm	28W	3397	2.6 kg	LL340202	T connector	0.6 kg
LL341602	1596mm	42W	5112	3.2 kg	LL340302	X connector	0.68 kg
LL342102	2128mm	56W	6812	4.1 kg			

Options

Finish	/BK	Black Body (RAL 9005)	/WT	White Body (RAL9016)	/RALXXX (Custom)
Kelvin	/3K	3000K	/4K	4000K	

Installation Accessories

LL33-15	PROLine connection pack
LL33-06	PROLine surface mounting clips - 2 point pack
LL33-36	PROLine surface mounting clips - 3 point pack
LL33-07	PROLine 3m suspension kit - 2 point pack
LL33-37	PROLine 3m suspension kit - 3 point pack
LL33-10	PROLine side wall kit
LL33-12	PROLine solid rod mounting kit
LL33-14	PROLine 2 in 1 connection pack & suspension




PROLine Linear LED Light

Customisable linear lighting system with square aperture optics



Luminaire Integrations




Profile Length	Indirect Lumens at 4000K
532mm	992
1064mm	1974
1596mm	2918
2128mm	3972

/UP
Indirect Light



/SPT
Integrated Spotlight

Lumens: 1206
Beam Angle: 24°
CRI: >90Ra
IP Rating: IP20
Rotation: 350°



Added Features

Added Features					
Dimming/Controls	/DD	DALI Dimming	/DH	Mains Dimming	/CC CASAMBI Controls
Emergency	/E	3H Integral Emergency			

Full Order Example

LL341602/BK/3K/DH	PROLine linear light with square aperture optics 1.6m (1596mm) black body 3000K with integrated mains dimmable driver
LL33-07	PROLine 3m suspension kit - 2 point pack

