



# SKYLine Linear LED Light

Hanging or ceiling mounted linear lights with Samsung LEDs and switchable output.

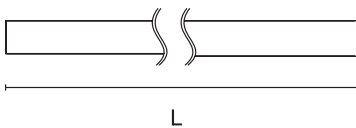

L	H	W
1200mm	60mm	50mm
1500mm	60mm	50mm
900mm	60mm	50mm

## Overview

<b>Construction Material</b>	Aluminium
<b>Body Finish</b>	Jet Black (RAL9005)
<b>Diffuser Type</b>	Opal polycarbonate (standard) Extra UGR film available (add on)
<b>IP Rating</b>	IP20
<b>IK Rating</b>	IK08
<b>Mounting</b>	Ceiling mounted or suspended with all accessories included
<b>Warranty</b>	3 years

## Luminaire Output

<b>Colour Temperature</b>	4000K
<b>CRI</b>	>90 Ra
<b>Efficacy</b>	126 lumens/watt
<b>Lighting Direction</b>	Downwards
<b>Beam Angle</b>	120°
<b>Operating Hours</b>	50,000
<b>Flicker Free</b>	Yes
<b>LEDs</b>	Samsung
<b>Macadam Ellipse</b>	Equal or less than 3 sdc <sub>m</sub>

## Supply & Power

<b>Voltage Range</b>	AC220-240V 50-60 Hz
<b>Power Factor</b>	>0.95
<b>Inrush Current</b>	15A
<b>Protection Class IEC</b>	Class I
<b>Ambient Temperature</b>	-20°C to +40°C
<b>Driver</b>	Integral, non dimmable



# SKYLine Linear LED Light

Hanging or ceiling mounted linear lights with Samsung LEDs and switchable output.

## Luminaire Variants Data

Variant	Length	Wattage	Lumens	Running Current	Weight
LLSLO92030W4KBK	900mm	20W   30W	2520   3780	DC550mA   DC700mA	1.25 kg
LLSL122740W4KBK	1200mm	27W   40W	3402   5040	DC700mA   DC1500mA	1.5 kg
LLSL153450W4KBK	1500mm	34W   50W	4284   6300	DC900mA   DC1300mA	1.85 kg

### Options

Finish	<b>BK</b>	Black Body
/UGR	<b>Low Glare Film</b>	(Add On)

Model /UGR	Adjusted Lumens
LLSLO92030W4KBK	2296   3420
LLSL122740W4K	3100   4560
LLSL153450W4K	3900   5700

### Code Example

LLSL153450W4KBK/UGR SKYLine 1.5m (1500mm) linear 34W/50W Switchable 4000K black body, with extra UGR film

